

Sable

695-720W

High efficiency bifacial modules

TOPCon

210mm

● TOPCon MODULE ADVANTAGE



Multi-Busbar technology



Superior load capacity



High module efficiency



Excellent low-light performance



Lower annual attenuation
Longer warranty



Low BOS and LCOE



Reduce hot spot effect



Higher bifaciality

● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


● PRODUCT CERTIFICATION



● INSURANCE



● WARRANTY

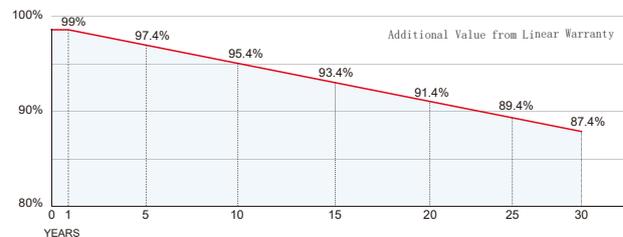

Guarantee on product material and workmanship




Linear power output warranty



Mechanical Specifications

External Dimension	2384 x 1303 x 33 mm
Weight	38.5 kg
Solar Cells	TOPCon 210×105 mm (132 pcs)
Front / Back Glass	2.0mm AR coating semi-tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ² , 250mm(+)/350mm(-) or Customized Length

Technical drawing

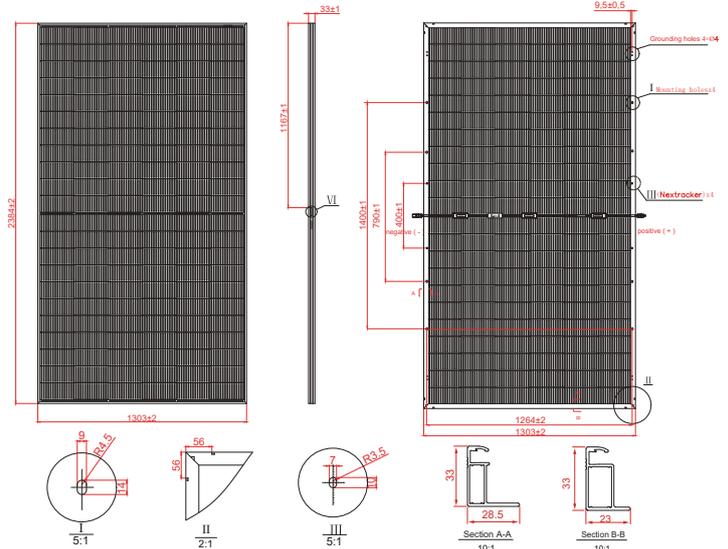

Packing Configuration

Container	40' HQ
Pieces per Pallet	33
Pallets per Container	18
Pieces per Container	594

Electrical Characteristics


Module Type	SRP-695-BTC-BG		SRP-700-BTC-BG		SRP-705-BTC-BG		SRP-710-BTC-BG		SRP-715-BTC-BG		SRP-720-BTC-BG	
	Front STC	Front BNP1										
Maximum Power -P _{mp} (W)	695	762	700	767	705	773	710	778	715	784	720	789
Open Circuit Voltage -V _{oc} (V)	48.30	48.38	48.50	48.58	48.70	48.78	48.90	48.98	49.10	49.18	49.30	49.38
Short Circuit Current -I _{sc} (A)	18.28	20.03	18.32	20.08	18.36	20.12	18.40	20.17	18.44	20.21	18.48	20.25
Maximum Power Voltage -V _{mp} (V)	40.33	40.41	40.53	40.61	40.73	40.81	40.93	41.01	41.13	41.21	41.33	41.41
Maximum Power Current -I _{mp} (A)	17.24	18.90	17.28	18.94	17.31	18.97	17.35	19.02	17.39	19.06	17.43	19.10
Module Efficiency STC-η _m (%)	22.37		22.53		22.70		22.86		23.02		23.18	
Power Tolerance (W)	(0, +4.99)											

STC: Irradiance 1000 W/m² module temperature 25 °C AM=1.5 Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%
 BNP1: front 1000 W/m² rear 135 W/m² Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-3%; Current measurement tolerance: +/-4%

Rear Side Power Gain (SRP-700-BTC-BG)

Power Gain	10%	15%	20%	25%	30%
Maximum Power -P _{mp} (W)	770	805	840	875	910
Open Circuit Voltage -V _{oc} (V)	48.50	48.50	48.50	48.50	48.50
Short Circuit Current -I _{sc} (A)	20.15	21.07	21.98	22.90	23.82
Maximum Power Voltage -V _{mp} (V)	40.53	40.53	40.53	40.53	40.53
Maximum Power Current -I _{mp} (A)	19.02	19.88	20.75	21.61	22.48

I-V Curve

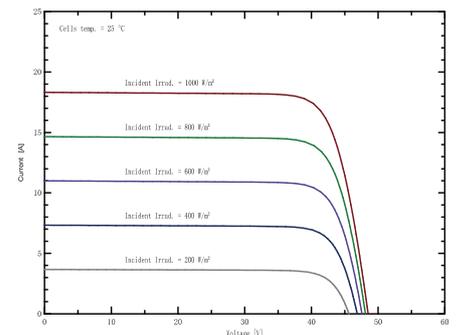

Temperature Ratings

P _{max} Temperature Coefficient	-0.29 %/° C
V _{oc} Temperature Coefficient	-0.25 %/° C
I _{sc} Temperature Coefficient	+0.046 %/° C

Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	35 A
Operating Temperature	-40~+85 ° C
Nominal Operating Cell Temperature	45±2 ° C
Bifaciality	80%±5%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

